




**70HT** (TR C-2)  
Valve Core  
Threaded to fit large  
bore valves. Packed 5  
to box.



**8971** (TR VC-6)  
Valve cap with screw  
driver top for core  
insertion and  
removal. Packed 25  
to box.



**8971H** (TR VC-7)  
Valve cap with hex  
top for wrench  
tightening. Packed 25  
to box.



**2113A** (TR VC-9)  
Dome type valve cap for low  
clearances. Packed 25 to  
box.



**880** (TR RG-80)  
O-ring seal for CH-8 and CH-16 core housings.  
Packed 10 to box.




**881** (TR RG-81)  
O-ring seal for swivel stem connectors. Packed  
10 to box.



**883**  
O-ring seal for LS-8871R valve spud. Packed  
10 to box.




**459** (TR RG-16)  
Rubber grommet for SP-8B valve spud.  
Packed 10 to box.



**880** (TR HN-80)  
Hex nut for 1/16"-24" SLB valve threads.  
Packed 10 to box.

## Do-it-yourself Extensions



**LS-8020**



**LS-8022**




**LS-8021**




**HN-80**

### LK-926 Parts Kit

Make your own flexible extensions right on the  
job site. Kit includes all the hardware for one  
extension. Flexible tubing is ordered  
separately in standard coil lengths indicated.  
Remove valve core housing from valve and  
transfer to end of extension. Packed 1 set to  
box.

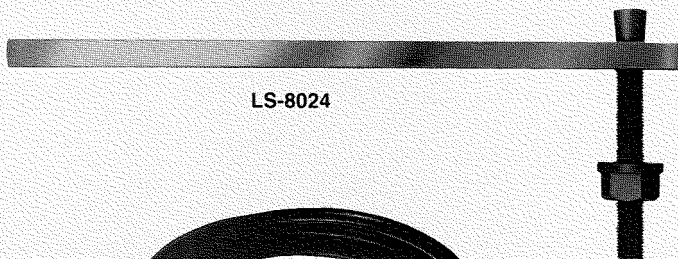

**LS-8024**

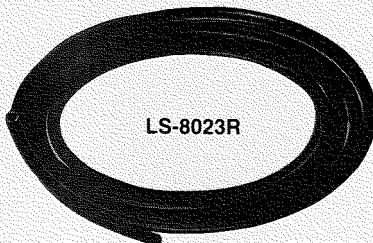

**LS-8023R**

### Valve Assembly Tool LS-8024

Assembles and crimps LK-926 parts onto  
tubing to make flexible extension. Packed 1 to  
box.

### Reinforced Tubing

Reinforced braided, flexible thermoplastic  
tubing. Tough and abrasive resistant, it is not  
affected by oils and is impervious to  
temperature change. Size: 1/16" O.D., 1/2" I.D.  
Available in two standard coil lengths.

**LS-8023R-5** 5'-0 coil

**LS-8023-25** 25'-0 coil